


# ROTO-CLEAN

Scouring system for weaving oil removal

Patented technology

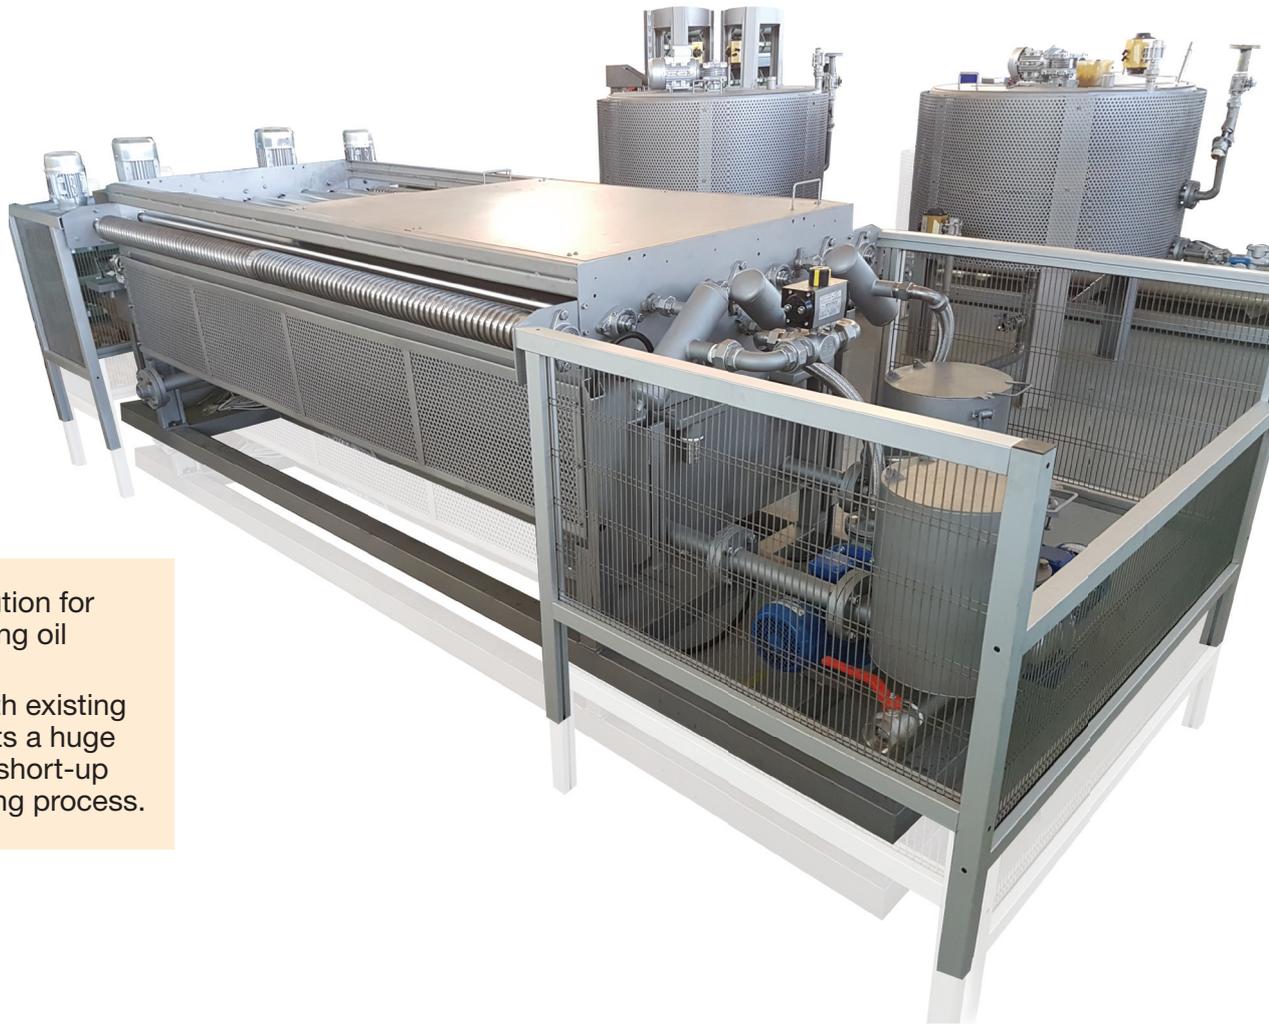

The “clever” solution for a reliable weaving oil removal.

Placed in line with existing stenter represents a huge cost saving and short-up the whole finishing process.



## Technical data

Installed power	Kw 9 STD
Max mechanical speed	2<150 mt/min
Working width	0,22< 3,4 MT
Steam consumption	315 kg/h
Air consumption	20 NI/Min
Spray system flow	From 100 up to 200 l/min adjustable
1st washing tank capacity	250 lt.
-2 <sup>ND</sup> washing tank capacity	250 lt.
Nr 2 - service tanks 2	Capacity 600 LTS/Each
Nr 2 dosing tanks capacity	30 LTS /Each
Nr 2 filtering units capacity	LT 30/Each
Control panel	Wide range TFT programmable
Plc system	Allen bradley

# ROTO-CLEAN

Scouring system for weaving oil removal

Patented technology

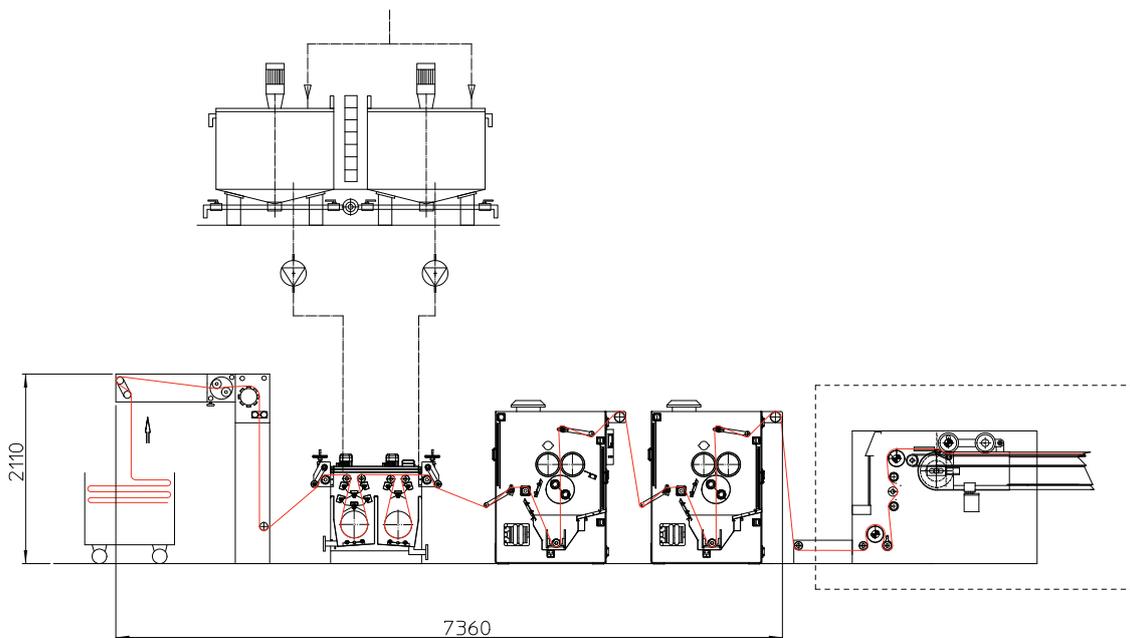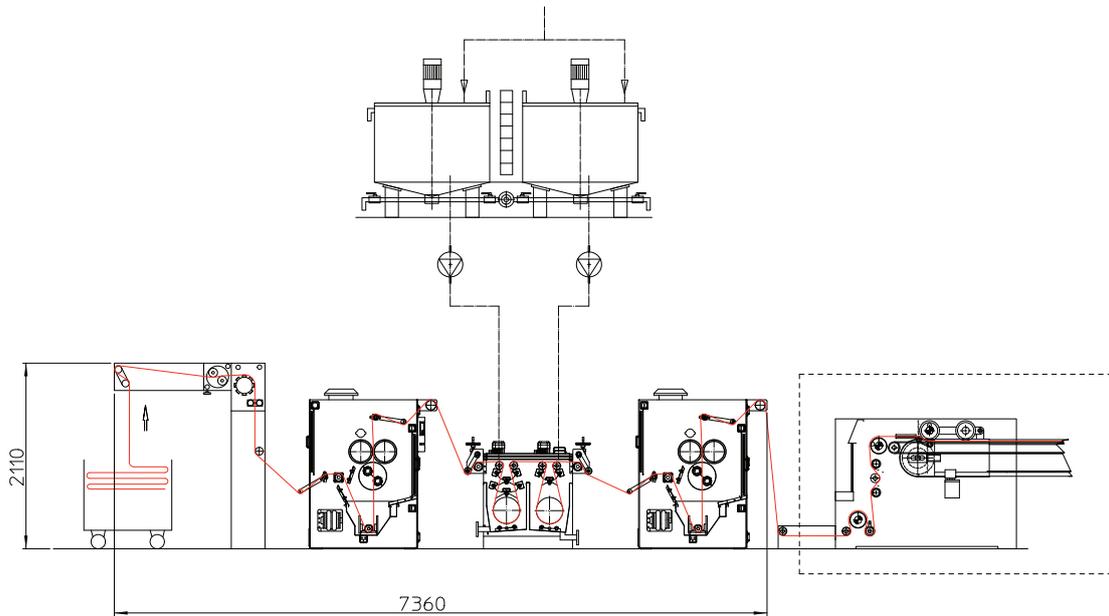

FERRARO SPA | Via Busto Arsizio, 120 | 21015 Lonate Pozzolo VA Italy  
T. +39 0331.302994 | F. +39 0331.302.968 | Cap. Soc. I.V. e 774.75  
ferraro@ferraro.it

[www.ferraro.it](http://www.ferraro.it)

